

**HERCULES**

**AKF**

**6362A**


**TORQUE REQUIREMENTS:**

#1 NUT NT 78109  
40-45 lbs. ft. (54-60 Nm)  
#9 CAP NUT NT 78110  
50-55 lbs. ft. (70-75 Nm)

**HERCULES**  
AKF 130S 6362A

Special Information:

ORDER NOZZLE SEPARATELY FROM HOLDER.

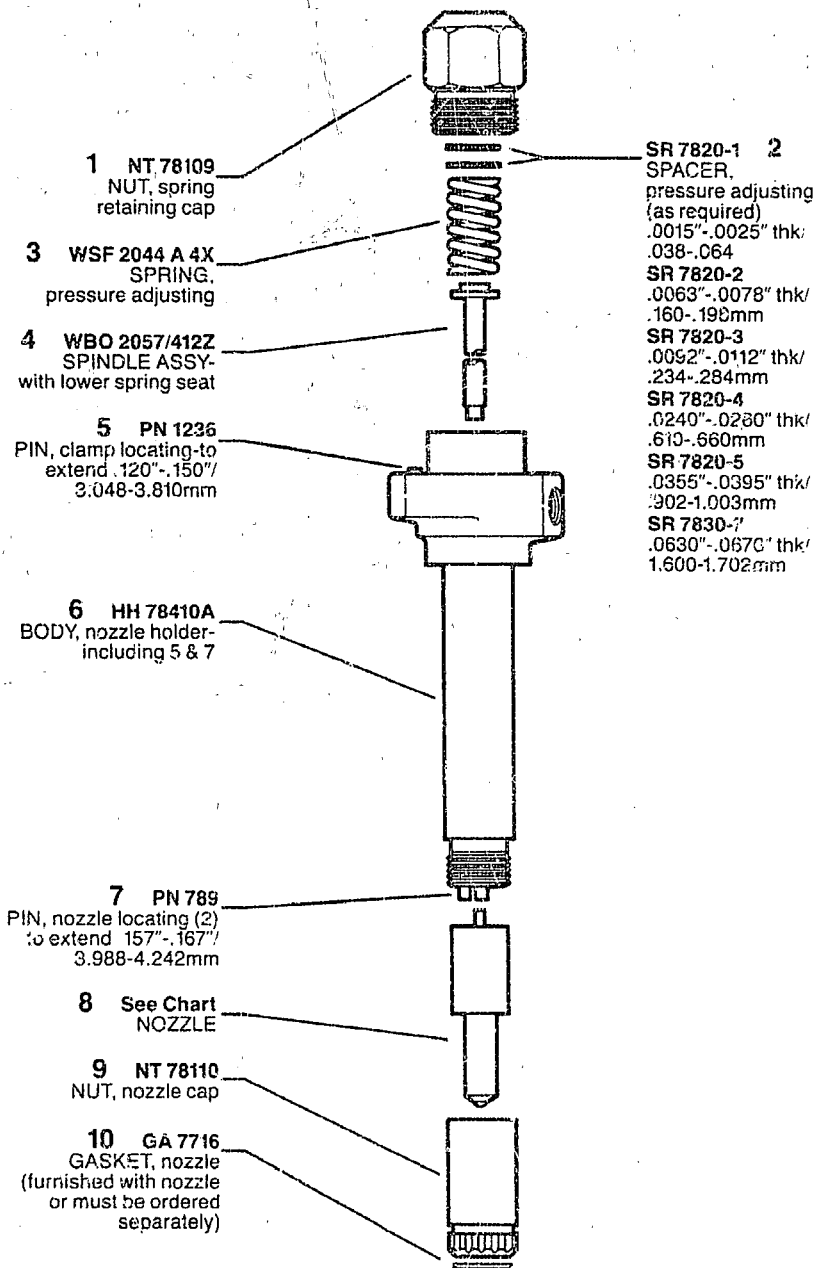

**AKF 130S 6362A**

**AKF 130S 6362A  
SERVICE DATA**

	Nozzle & Holder	Customer Number	Code	Nozzle Number
1	KT 7827	375380 **7748863	NONE	ADB 355 124-7
2	KT 7828	375184 **10935284	NONE	ADB 355 130-7
3	KT 7834	597405 **11641806	NONE	ADB 305 156-7

\*Nozzle & Holder number for reference only. Order holder and/or nozzle separately.

\*\*Ordnance Number

	Opening Pressure New Spring		Opening Pressure Used Spring	
	PSI	Bar	PSI	Bar
1	3050-3150	212-219	2750	191
2	3050-3150	212-219	2750	191
3	3050-3150	212-219	2750	191

	Lift	Number of Holes	Hole Diameter	Seat Angle
1	.021"/.53mm	2	.400	90°
2	.021"/.53mm	1	.700	90°
3	.018"/.46mm	1	.700	90°

# AKF 130S 6362A