

HERCULES

AKF

6614A



**UNITED
TECHNOLOGIES
DIESEL SYSTEMS**


TORQUE REQUIREMENTS:

- #1 CAP CP 7830
50-60 lbs. ft. (70-80 Nm)
- #10 NUT NT 78110
50-55 lbs. ft. (70-75 Nm)

**HERCULES
AKF 130S 6614A**

Special Information:

ORDER NOZZLE SEPARATELY FROM HOLDER.

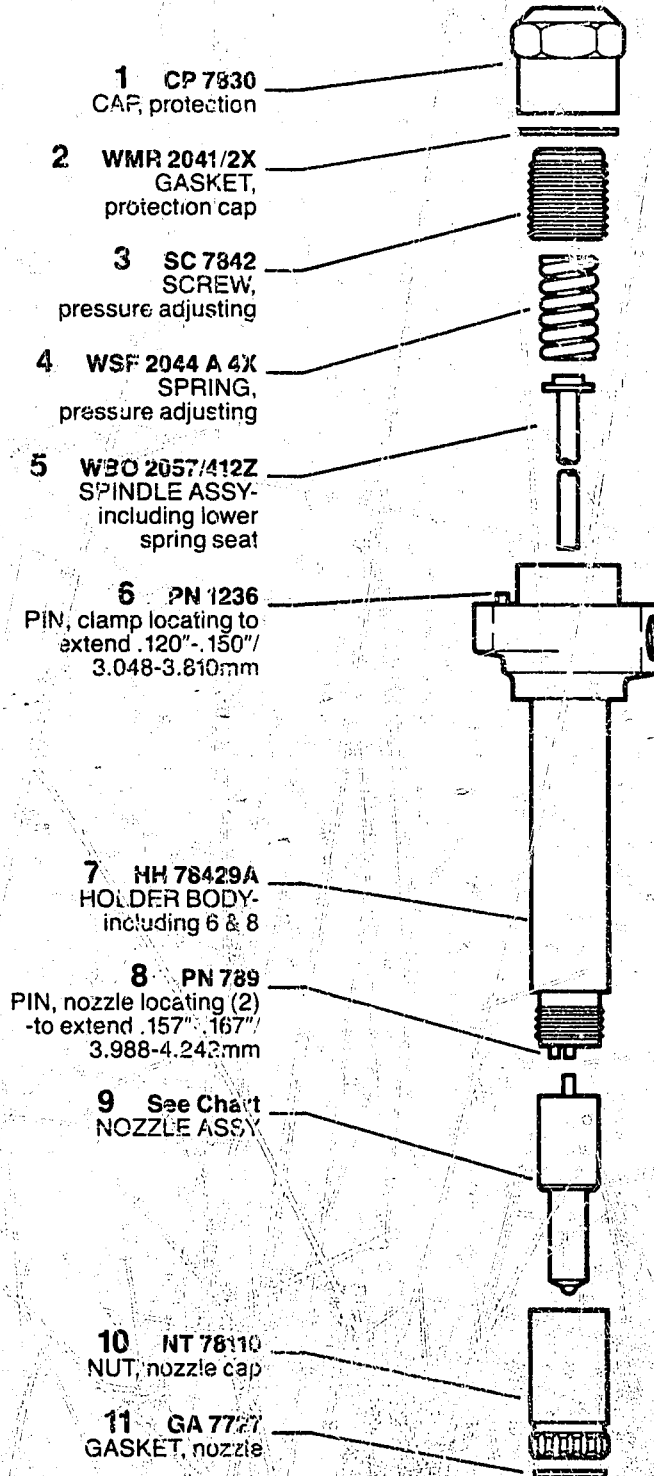

AKF 130S 6614A

**AKF 130S 6614A
SERVICE DATA**

	Nozzle & Holder	Customer Number	Code	Nozzle Number
1	KT 7846	**7748863	NONE	ADB 35S 124-7
2	KT 7847	**10935284	NONE	ADB 35S 130-7
3	KT 7848	**11641806	NONE	ADB 35S 156-7

*Nozzle & Holder number for reference only. Order holder and/or nozzle separately.

**Ordinance Number

	Opening Pressure New Spring		Opening Pressure Used Spring	
	PSI	Bar	PSI	Bar
1	3050-3150	212-219	2750	191
2	3050-3150	212-219	2750	191
3	3050-3150	212-219	2750	191

	Lift	Number of Holes	Hole Diameter	Seat Angle
1	.021"/.53mm	2	.400	90°
2	.021"/.53mm	1	.700	90°
3	.018"/.46mm	1	.700	90°

AKF 130S 6614A