


**IH
AKN
6425A**

TORQUE REQUIREMENTS:
#8 CAP NUT NT 780118
30-35 lbs. ft. (41-48 Nm)

INTERNATIONAL HARVESTER
AKN 90M 6425A

Special Information:

ORDER NOZZLE SEPARATELY FROM HOLDER.

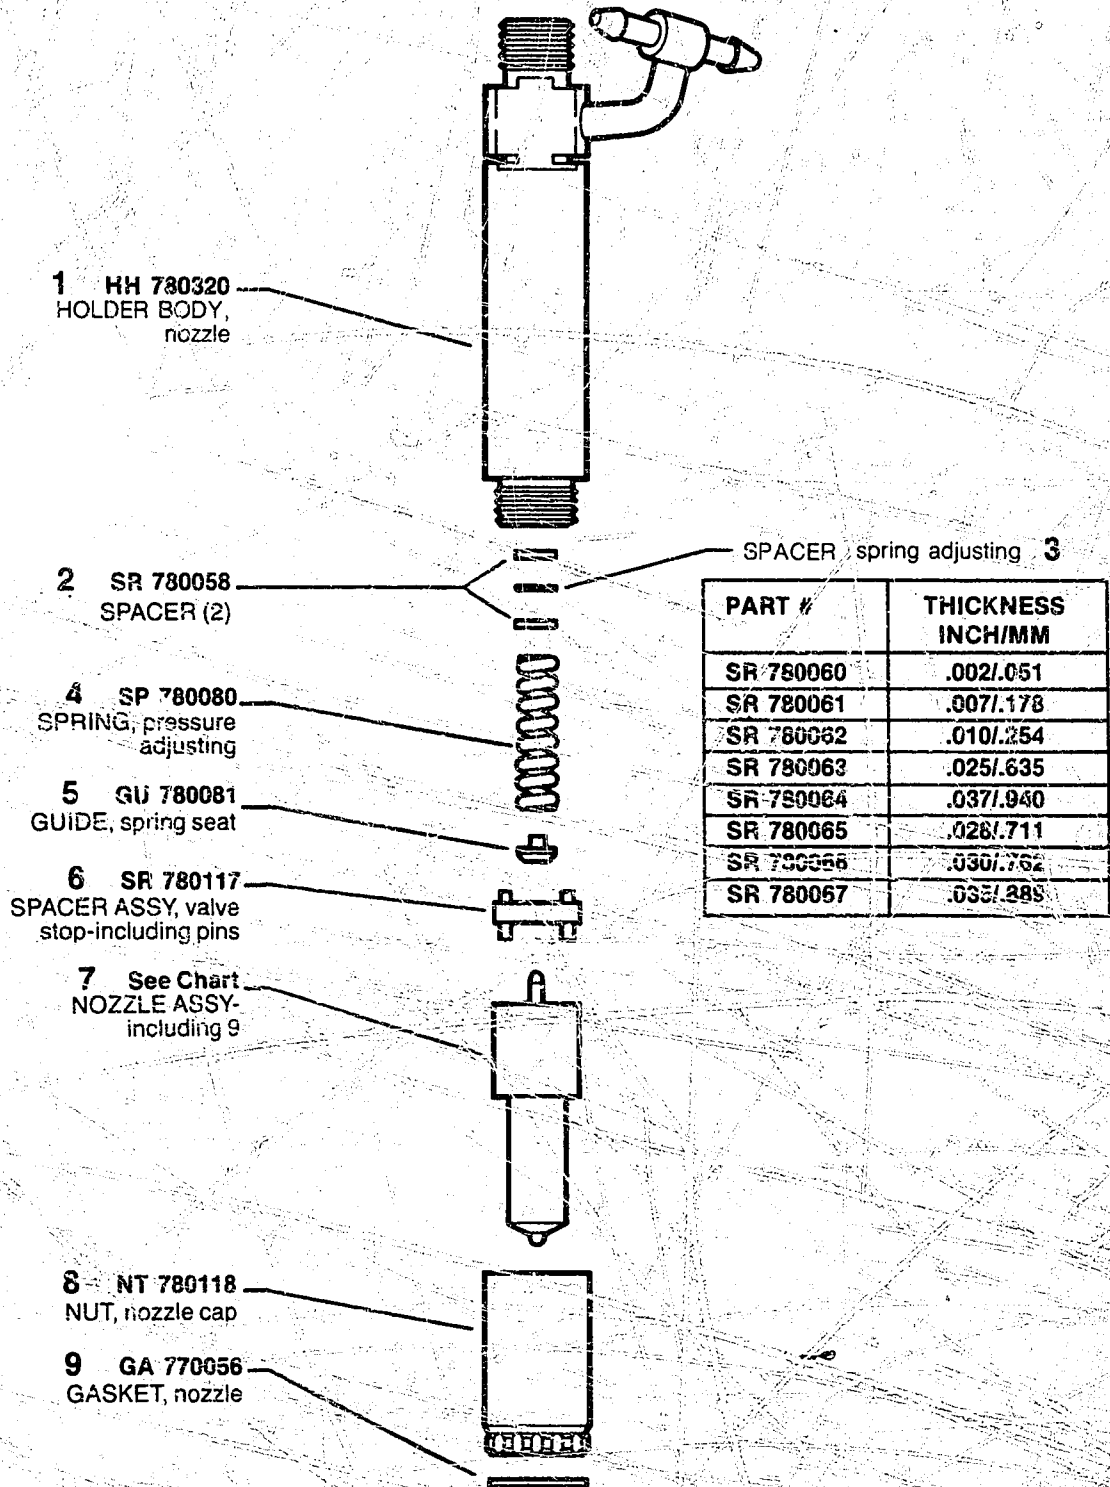

AKN 90M 6425A

**AKN 90M 6425A
SERVICE DATA**

	*Nozzle & Holder	Customer Number	Code	Nozzle Number
1	NHM 780323 NHA 7805-1/1	675 960-C91	A	NBM 770052 ADB 152M 164-7
2	NHM 780324 NHA 7805-2/1	675 967-C91	B	NBM 770053 ADB 152M 165-7
3	NHM 780325 NHA 7805-3/1	682 654-C91	D	NBM 770048 ADB 150M 168-7
4	NHM 780326 NHA 7805-4/1	687 147-C91	J	NBM 770054 ADB 152M 206-7
5	NHM 780327 NHA 7805-5/1	687 714-C91	K	ADB 152M 199-7
6	NHM 780328 NHA 7805-6/1	688 840-C91	N	NBM 770049 ADB 150M 208-7
7	NHM 780329 NHA 7805-7/1	687 372-C91	P	NBM 770055 ADB 152M 213-7
8	NHM 780330 NHA 7805-8/1	691 348-C91	R	NBM 770050 ADB 150M 228-7
9	NHM 780331 NHA 7805-9/1	180 2769-C91	S	NBM 770051 ADB 150M 236-7
10	NHM 780332	180 6407-C91	U	NBM 770069

*Nozzle & Holder number for reference only. Order holder and/or nozzle separately.



	Opening Pressure		Reset @ (or below)	
	PSI	Bar	PSI	Bar
1	3600-3750	248-259	2900	200
2	3600-3750	248-259	2900	200
3	3600-3750	248-259	2900	200
4	3600-3750	248-259	2900	200
5	3600-3750	248-259	2900	200
6	3600-3750	248-259	2900	200
7	3600-3750	248-259	2900	200
8	3600-3750	248-259	2900	200
9	3600-3750	248-259	2900	200
10	3600-3750	248-259	2900	200

	Lift	Number of Holes	Hole Diameter	Seat Angle
1	.019"/.44mm	4	.275	60°
2	.021"/.53mm	4	.300	60°
3	.023"/.58mm	4	.330	60°
4	.021"/.53mm	4	.300	60°
5	.021"/.53mm	4	.310	60°
6	.021"/.53mm	4	.360	60°
7	.021"/.53mm	4	.345	60°
8	.021"/.53mm	4	.360	60°
9	.021"/.53mm	4	.345	60°
10	.021"/.53mm	4	.360	60°

AKN 90M 6425A