

**MACK**

**AKN**

**6567A**




**UNITED  
TECHNOLOGIES  
DIESEL SYSTEMS**

**TORQUE REQUIREMENTS:**  
#11 CAP NUT NT 78128  
30-35 lbs. ft. (40-48 Nm)

**MACK  
AKN 137M 6567A**

**Special Information:**

ORDER NOZZLE SEPARATELY FROM HOLDER.

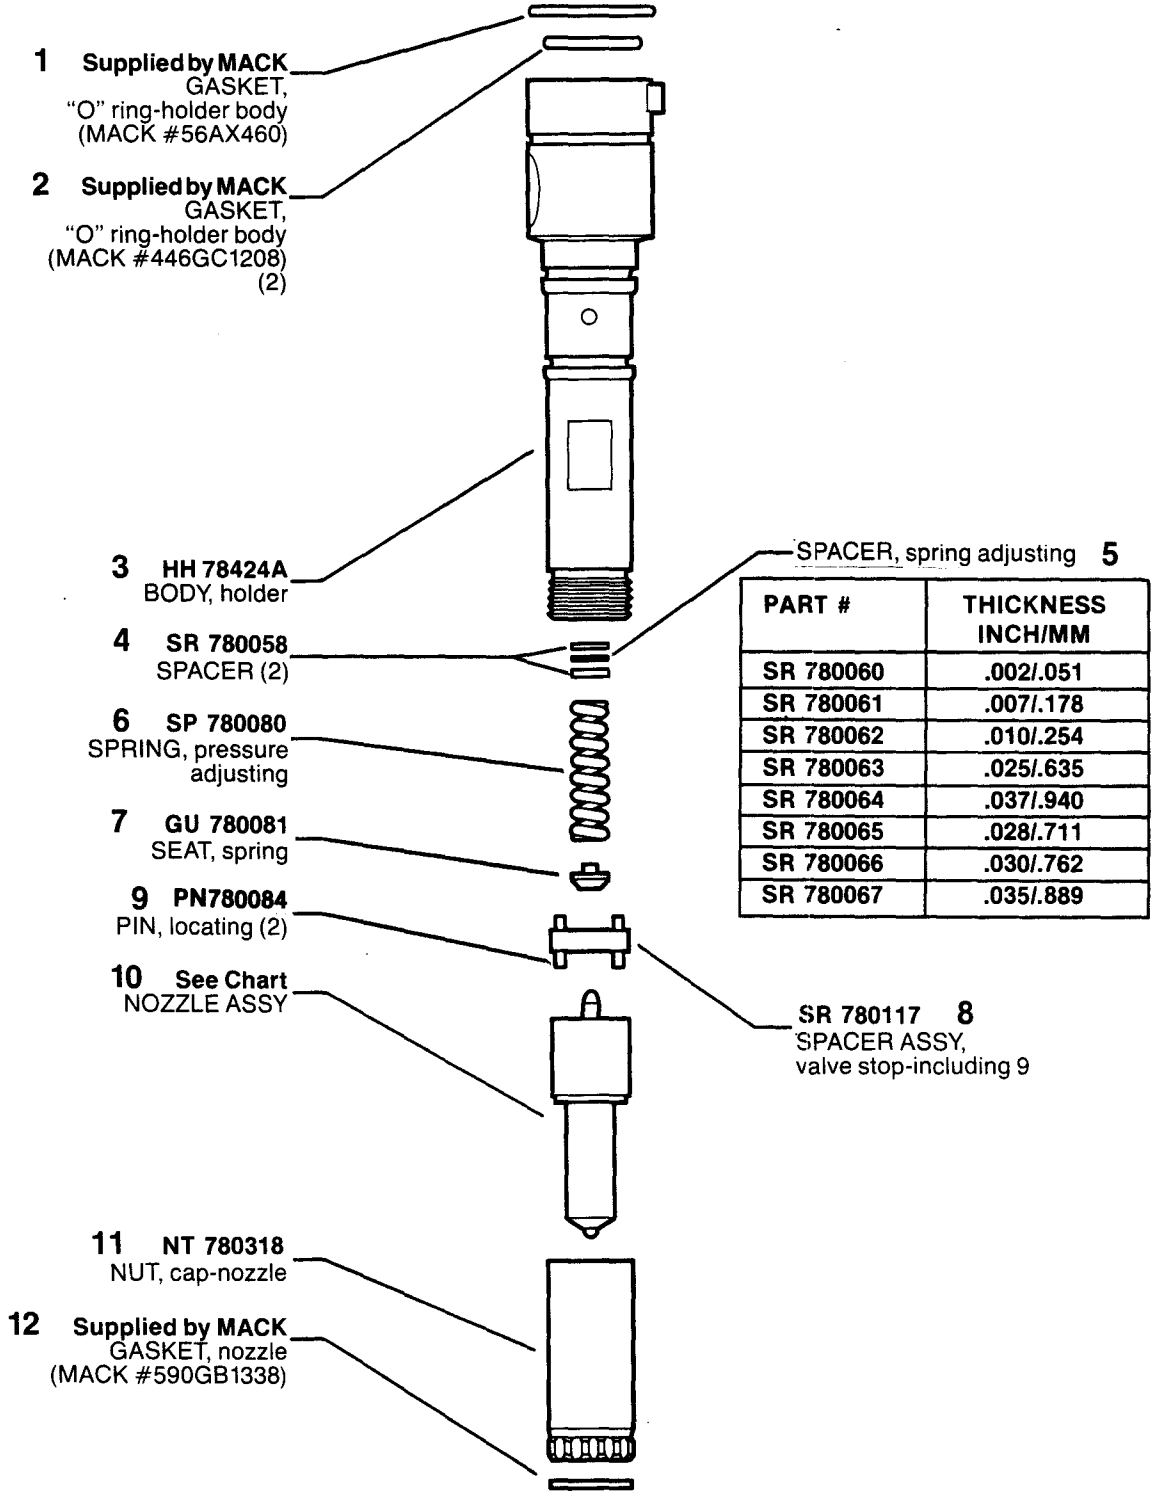

**AKN 137M 6567A**

**AKN 137M 6567A  
SERVICE DATA**

	*Nozzle & Holder	Holder Code #	Customer Number	Code	Nozzle Number
1	NHA 7806-1/1	1	736GB259	NONE	ADB 155M 207-7 NBM 770046
2	NHA 7806-2/1	1	NONE	NONE	ADB 155M 212-7
3	NHA 7806-3/2	2	NONE	NONE	ADB 160M 215-7 NBM 770047
4	NHA 7806-4/2	2	NONE	NONE	NBM 770042

\*Nozzle & Holder number for reference only. Order holder and/or nozzle separately.

	Opening Pressure (New & Used Assemblies)		Reset When Nozzle Opening Pressure Drops to or Below	
	PSI	Bar	PSI	Bar
1	3800-3950	264-275	3230	225
2	3900-3950	264-275	3230	225
3	4200-4350	292-303	3570	248
4	4200-4350	292-303	3570	248

	Lift	Number of Holes	Hole Diameter	Seat Angle
1	.021"/.53mm	6	.290	60°
2	.023"/.58mm	6	.310	60°
3	.021"/.53mm	6	.290	60°
4	.021"/.53mm	6	.270	60°