

**BRITISH
LEYLAND**

AKN

6721A




**UNITED
TECHNOLOGIES
DIESEL SYSTEMS**

TORQUE REQUIREMENTS:
 #3 STUD SD 78118
 95-105 lbs. ft. (128.82-142.38 Nm)
 #11 NUT NT 78123
 30-35 lbs. ft. (40.68-47.46 Nm)

**BRITISH LEYLAND
AKN 88M 6721A**

Special Information:

ORDER NOZZLE SEPARATELY FROM HOLDER.

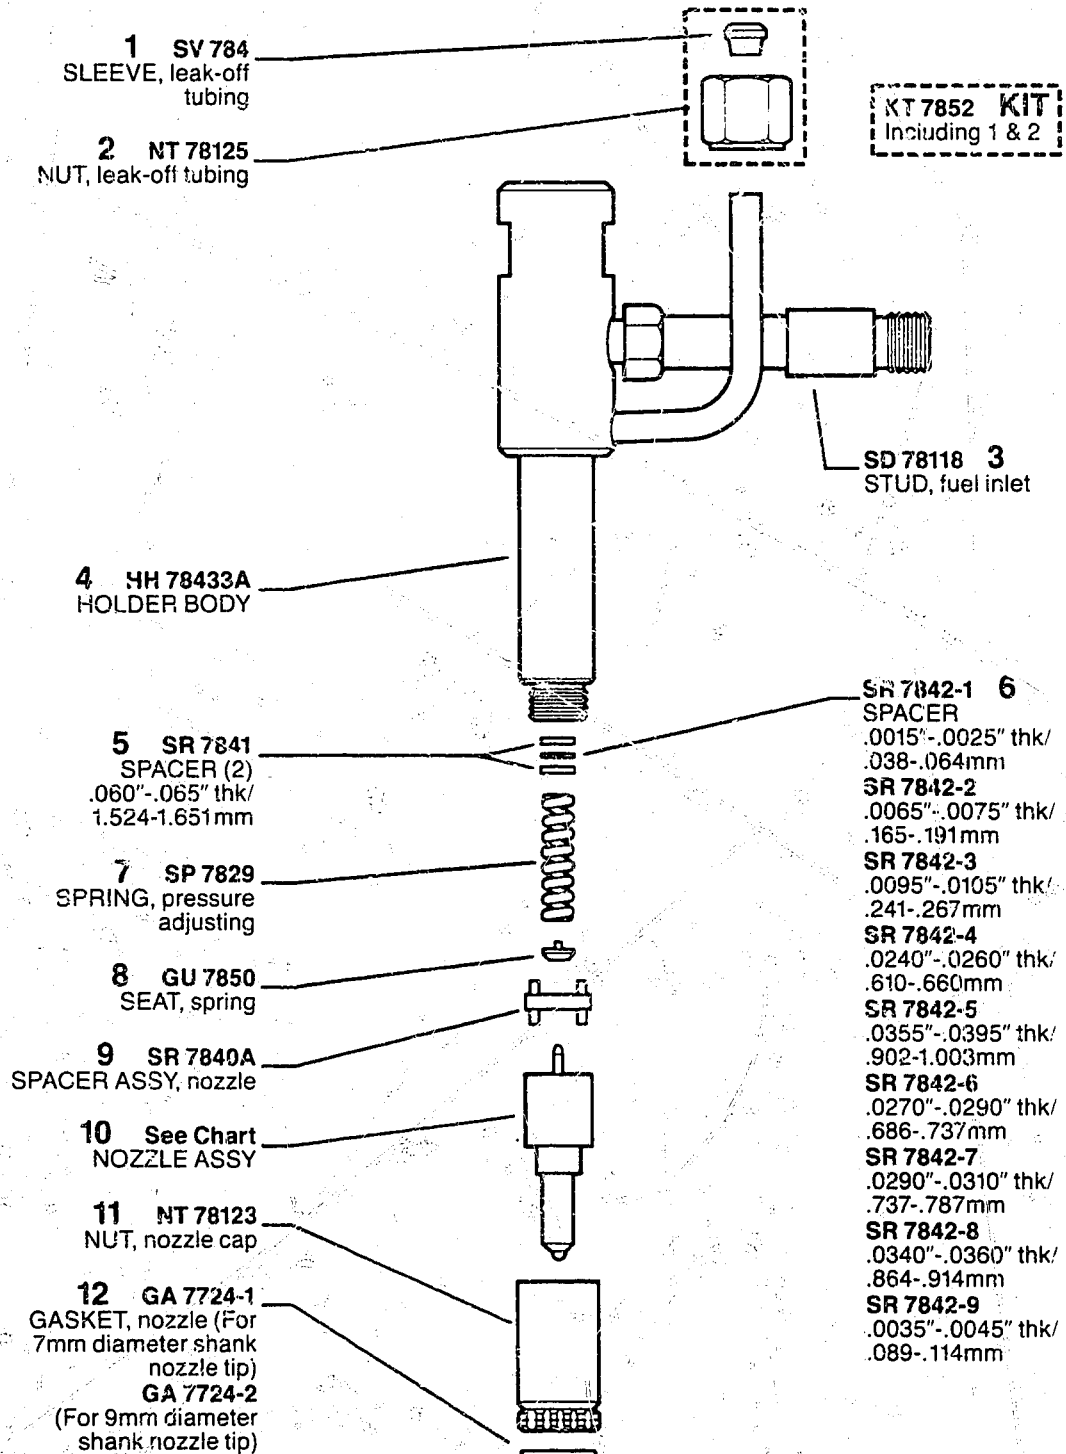

AKN 88M 6721A

**AKN 88M 6721A
SERVICE DATA**

	Nozzle & Holder	Customer Number	Code	Nozzle Number
1	NHA 7815-1/1	ACU 1765-Y01	NONE	ADB 140M 214-7
2	NHA 7815-2/1	ACU 1765-Y0R	NONE	ADB 140M 216-7
3	NHA 7815-3/1	NAJ 1415-Y02	NONE	ADB 140M 222-7
4	NHA 7815-4/1	NAJ 1415-Y01	NONE	ADB 140M 221-7
5	NHA 7815-5/1	NAJ 1415-Y03	NONE	ADB 140M 233-7

*Nozzle & Holder number for reference only. Order holder and/or nozzle separately.

	Opening Pressure		Reset @	
	PSI	Bar	PSI	Bar
1	3450-3600	240-251	2932	205
2	3450-3600	240-251	2932	205
3	3450-3600	240-251	2932	205
4	3450-3600	240-251	2932	205
5	3450-3600	240-251	2932	205

	Lift	Number of Holes	Hole Diameter	Seat Angle
1	.023"/.58mm	4	.390	60°
2	.025"/.64mm	4	.410	60°
3	.019"/.48mm	4	.330	60°
4	.023"/.58mm	4	.390	60°
5	.021"/.53mm	4	.350	60°

AKN 88M 6721A