



THIS DRAWING, WHICH CONTAINS PROPRIETARY INFORMATION, IS THE PROPERTY OF MAGNETIC SENSORS CORPORATION. IT SHALL NOT BE REPRODUCED IN ANY MANNER NOR DISCLOSED TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF M.S.C.

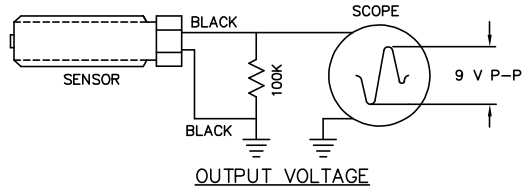

REVISIONS			
LTR	DESCRIPTION	DATE	APPRVD
-	PRELIMINARY RELEASE	1.6.05	

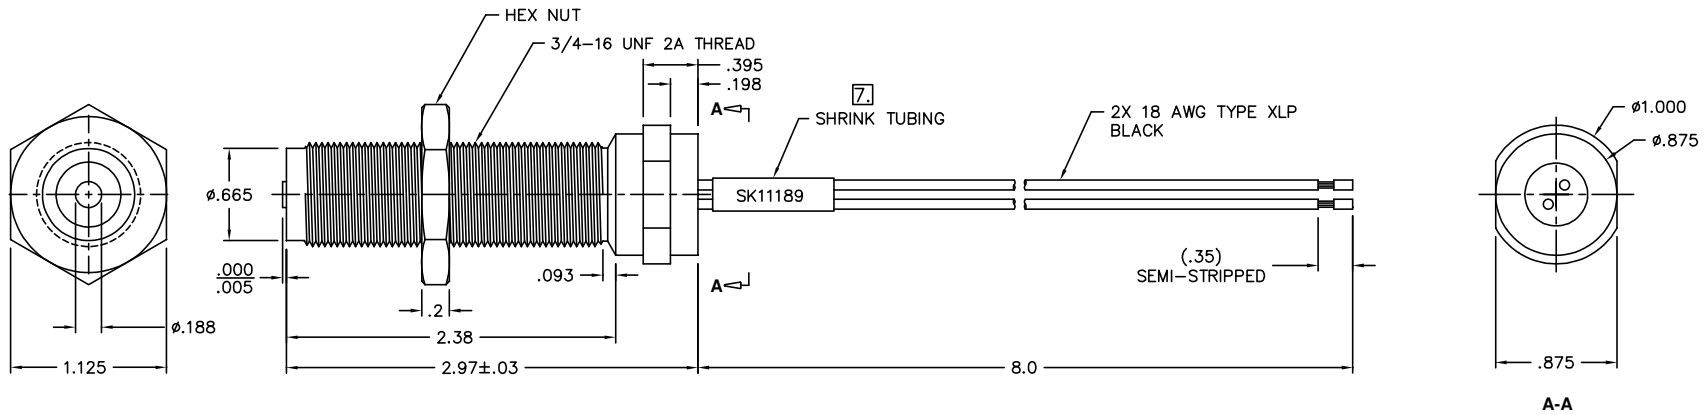

**SPECIFICATIONS:**

- RESISTANCE: 40-85 OHMS.
- INDUCTANCE: 25 mH ± 20%
- OUTPUT: 9 V P-P MIN AT THE FOLLOWING CONDITIONS:  
AIRGAP: .030  
SURFACE SPEED: 1000 I.P.S.  
TEST WHEEL: 8 PITCH GEAR.  
LOAD: 100K OHMS.
- OPERATING TEMPERATURE: -40°F TO 225°F.  
STORAGE TEMPERATURE: -65°F TO 225°F.
- CASE MATERIAL: GOLD ANODIZE ALUMINUM.
- LEADS MUST WITHSTAND PULL TEST OF 10 LBS.
- MARK SHRINK TUBING WITH "MSC P/N" AND DATE CODE (MM-YYYY).  
USING .062 NOM CHARACTERS.

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE FRACTIONS DECIMALS ANGLES: ± 1/64 .001 ± .01 ± 1/2 .001 ± .005		CONTRACT NO.	
		MATERIAL		APPROVALS	DATE
		FINISH		DRAWN	S.L.
		NEXT ASSY USED ON APPLICATION		CHECKED	APPRVD
		SK11189		MP 411449	
		DO NOT SCALE DRAWING		REV. A	
V.R. SPEED SENSOR					
SIZE	CODE	INDENT	DRAWING NO.		
B	OLVP6		SK11189		
SCALE: NONE	AMBC	SHEET		1 OF 1	