


HH  
AKN  
6845  
A1

**TORQUE REQUIREMENTS:**  
#8 CAP NUT NT 780118  
30-35 lbs. ft. (41-48 Nm)

**INTERNATIONAL HARVESTER**  
AKN 62M 6845A1

Special Information:

ORDER NOZZLE SEPARATELY FROM HOLDER.

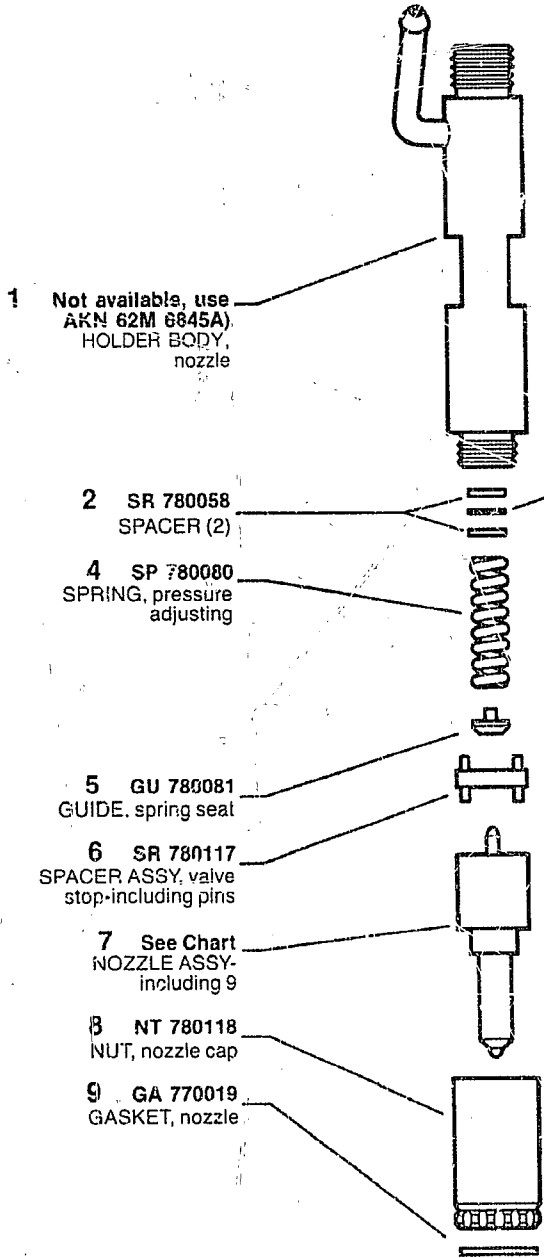

- 1 Not available, use AKN 62M 6845A) HOLDER BODY, nozzle
- 2 SR 780058 SPACER (2)
- 4 SP 780080 SPRING, pressure adjusting
- 5 GU 780081 GUIDE, spring seat
- 6 SR 780117 SPACER ASSY, valve stop-including pins
- 7 See Chart NOZZLE ASSY-including 9
- 8 NT 780118 NUT, nozzle cap
- 9 GA 770019 GASKET, nozzle

SPACER spring adjusting 3

PART #	THICKNESS INCH/MM
SR 780050	.002/.051
SR 780061	.007/.178
SR 780062	.010/.254
SR 780063	.025/.635
SR 780064	.037/.940
SR 780065	.028/.711
SR 780066	.030/.762
SR 780067	.035/.889

**AKN 62M 6845A1  
SERVICE DATA**

	*Nozzle & Holder	Customer Number	Code	Nozzle Number
1	NHA 7817-1/1	489 116 C92	NONE	ADB 150M 223-7
2	NHA 7817-2/1	170 1170 C91	B	ADB 150M 230-7

\*Nozzle & Holder number for reference only. Order holder and/or nozzle separately.

	Opening Pressure		Reset @	
	PSI	Bar	PSI	Bar
1	3075-3225	214-224	2600	181
2	3075-3225	214-224	2600	181

	Lift	Number of Holes	Hole Diameter	Seat Angle
1	.019"/.48mm	4	.290	60°
2	.019"/.48mm	4	.290	60°