

HERCULES

AKF

5677



**UNITED
TECHNOLOGIES
DIESEL SYSTEMS**


TORQUE REQUIREMENTS:

- #1 NUT NT 78109
40-45 lbs. ft.
- #9 CAP NUT NT 78110
50-55 lbs. ft.

**HERCULES
AKF 130S 5677**

Special Information:

ORDER NOZZLE SEPARATELY FROM HOLDER.

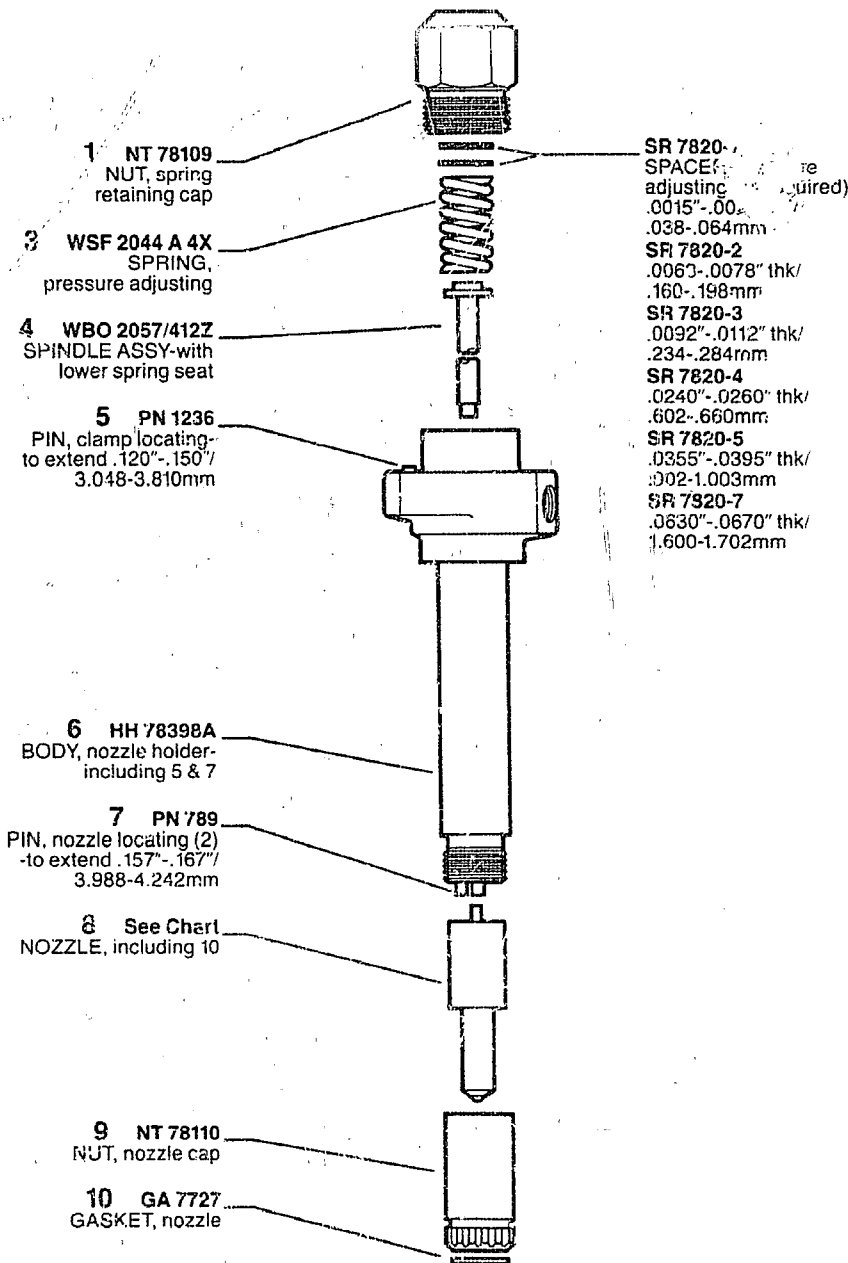

AKF 130S 5677

**AKF 130S 5677
SERVICE DATA**

	*Nozzle & Holder	Customer Number	Code	Nozzle Number
1	KT 7827	375360 **7748833	NONE	ADB 355 124-7
2	KT 7828	375184 **10935284	NONE	ADB 355 130-7
3	KT 7834	597405 **11641806	NONE	ADB 305 156-7

*Nozzle & Holder number for reference only. Order holder and/or nozzle separately.
** Ordnance Number

	Opening Pressure New Spring		Opening Pressure Used Spring	
	PSI	Bar	PSI	Bar
1	3050-3150	212-219	2750	191
2	3050-3150	212-219	2750	191
3	3050-3150	212-219	2750	191

	Lift	Number of Holes	Hole Diameter	Seat Angle
1	.021"/.53mm	2	.400	90°
2	.021"/.53mm	1	.700	90°
3	.018"/.46mm	1	.700	90°

AKF 130S 5677