

WHITE

AKN

6844

A & B



**UNITED
TECHNOLOGIES
DIESEL SYSTEMS**


TORQUE REQUIREMENTS:

- #1 ADAPTER AD7811
30-35 lbs. ft. (40-48 Nm)
- #13 CAP NUT NT 78122
45-50 lbs. ft. (40-48 Nm)

**WHITE
AKN 130SM 6844A & B**

Special Information:

ORDER NOZZLE SEPARATELY FROM HOLDER.

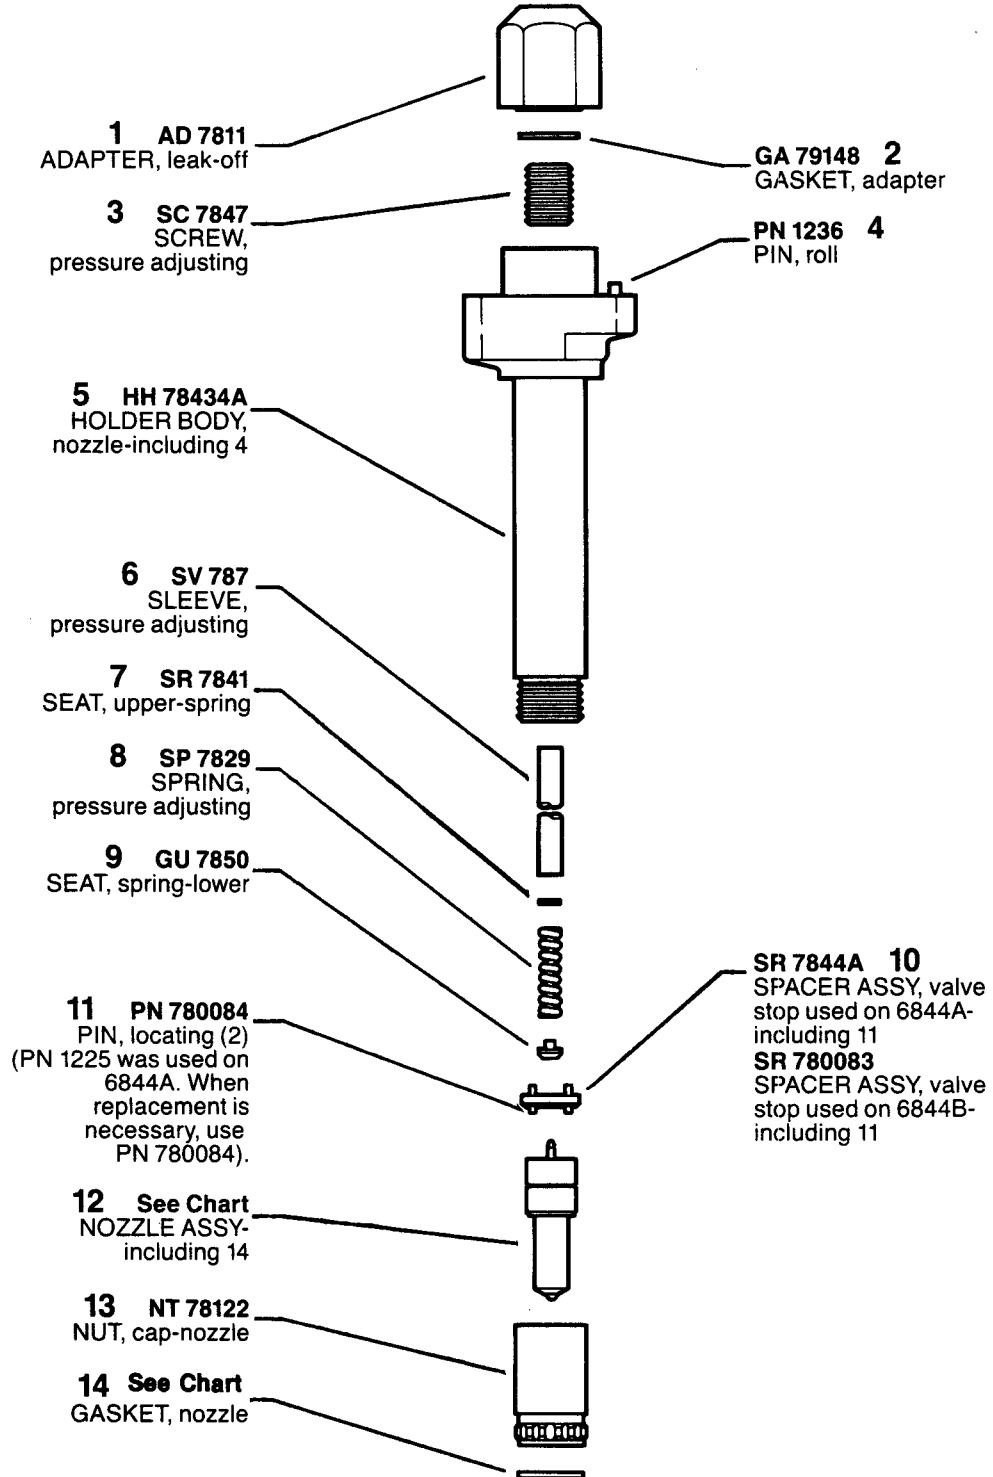

AKN 130SM 6844A & B

AKN 130SM 6844A & B
SERVICE DATA

	*Nozzle & Holder	Customer Number	Code	Nozzle Number Nozzle Gasket Number
1	NHA 7816-1/1	40-3855052	NONE	ADB 35M220-7 GA 7716
2	NHA 7816-2/1	40-3055153	NONE	NBM 770080 GA 7716

*Nozzle & Holder number for reference only. Order holder and/or nozzle separately.

	Opening Pressure		Reset @ (or below)	
	PSI	Bar	PSI	Bar
1	3050-3200	212-223	2600	181
2	3050-3200	212-223	2600	181

	Lift	Number of Holes	Hole Diameter	Seat Angle
1	.021"/.53mm	2	1 @ .480 1 @ .530	60°
2	.019"/.48mm	2	1 @ .400 1 @ .450	60°

AKN 130SM 6844 B2
SERVICE DATA

	*Nozzle & Holder	Customer Number	Code	Nozzle Number Nozzle Gasket Number
1	NHM 780696	40-1055551	NONE	NBM 770138 GA 7727

*Nozzle & Holder number for reference only. Order holder and/or nozzle separately.

	Opening Pressure		Reset @ (or below)	
	PSI	Bar	PSI	Bar
1	3600-3750	248-259	3060	211

	Lift	Number of Holes	Hole Diameter	Seat Angle
1	.019"/.48mm	2	1 @ .400 1 @ .450	60°

AKN 130SM 6844A & B